

NTSC

Digital BETACAMTM DVW-510

Component Digital Videocassette Player



The development of the Betacam® format in 1982 made possible the introduction of compact camcorders which had a revolutionary effect on ENG operations. In 1987, Betacam SP® was introduced. Based on metal particle tape, its improved picture quality extended the use of the format to post production and transmission applications. With their outstanding performance, production flexibility and reliability, Betacam VTRs soon established the format as a de facto standard throughout the broadcast industry. Sony was also beginning a major research and development program into digital video technology, a program which led to the introduction of the world's first D-1 component digital VTR and more recently to a wide range of CCIR 601 based products, with Serial Digital Interface (SDI), for emerging full component digital operations.

To provide a smooth transition from existing analog operations to those based on this digital technology, Sony has now developed the DVW-510 Player, one of a range of Digital BETACAM™ component digital VTRs. They inherit the Betacam concept of an affordable workhorse format but add many new advantages made possible by the introduction of innovative technologies.

The DVW-510 provides the superb picture quality of component digital recording in a compact VTR with cassette tapes which are the same size as those of analog Betacam machines.

With outstanding performance and a whole range of new functions, the DVW-510 offers real advantages to satisfy the future needs of the television industry and other users.



Features

Excellent Picture and Sound Quality

Superb Picture Quality

The DVW-510 uses the Digital BETACAM component digital recording format which provides superb picture quality and multi-generation capability to overcome the limitations of analog recording. This technique provides much greater operational flexibility, for example by minimizing dubbing limitations to allow more efficient and complex multi-layering and editing. Because it meets the CCIR 601 standard, the Digital BETACAM format is also suitable for emerging 16:9 wide-screen operations.

High Quality Digital Audio

The DVW-510 provides four 20-bit digital audio signal channels. To ensure a wide dynamic range for analog audio signals, a super linear D/A converter is used in the DVW-510 to achieve the required high resolution.

Long Playback Time

To gain maximum performance from high density digital recording, new metal particle cassette tapes have been developed exclusively for Digital BETACAM VTRs. To cover different applications, both large and small size cassettes are available and these have the same dimensions as current Betacam cassettes.

The use of this highly efficient data handling regime achieves a longer playback time than that of the current Betacam format. A large cassette provides a maximum playback time of 124 minutes and a small cassette up to 40 minutes.



Versatility for Current System Environments

Compact and Lightweight

With the development of an efficient data handling system and application-specific LSIs for signal processing and system control, the DVW-510 is compact and lightweight. It has the same dimensions as current Betacam SP studio models, so it can replace them without any modification to existing system configurations. In addition, its weight of approximately 32 kg (71 lb) is comparable to current Betacam SP studio VTRs. The use of LSIs also contributes to a low power consumption of 140W. This compact, light weight and low power consuming unit is highly practical, particularly in a limited space environment such as inside an OB van.



Versatile Integration into Current Analog Systems

The DVW-510 has been specifically designed for easy integration into existing analog systems. Built-in D/A converters for both audio and video signals allow direct interfacing with analog equipment. In addition to analog component interfaces, analog composite output ports are incorporated to provide a direct link with existing NTSC systems. Physical dimensions that are identical to those of Betacam SP VTRs and cassettes also mean that



BVC-400A

Sony Library Management System™ (LMS) and Flexicart® multicassette systems can be easily upgraded to digital operation—and the DVW-CA510 player has been introduced specifically for Sony Betacart® systems.



DVW-CA510

Serial Digital Interface

The DVW-510 is equipped with SDI (Serial Digital Interface) which conforms to the SMPTE259M. A 4:2:2 component digital video signal, together with four digital audio channels and time code are carried via a single coaxial cable, allowing simple connection with other SDI equipped devices—including Sony DVS Series switchers. Furthermore, SDI also gives the benefit of long distance transmission—at least 200 meters without any extra hardware.

Comprehensive Editing Features

Digital Jog Sound

Complete reproduction of four channels of digital audio is achieved within the range of -1 to +1 times normal playback speed, even in the Jog mode. This feature is helpful in quickly and precisely establishing an editing point while monitoring the digital audio signals, which remain in absolute sync with the pictures.

High Speed Picture Search

Recognizable color pictures are provided in shuttle mode at speeds up to approx. ± 50 times normal playback. In addition, recognizable digital audio playback is also provided up to approx. ± 24 times normal playback speed. These capabilities allow the desired picture to be rapidly located.

Two-way Dial Operation

The DVW-510 features two alternative ways of selecting the Jog and Shuttle modes. For users familiar with current Betacam VTR operation, pressing the search dial switches between these two modes. Additionally, Jog, Shuttle and VAR buttons are located just above the search dial, so that the operator also has push-button mode selection in the same manner as Sony BVH Series 1-inch VTRs and D-1/D-2 DVR Series VTRs.

Dynamic Tracking™ Playback

A DT playback capability provides broadcast quality pictures over the range of -1 to +3 times normal playback speed.

Dynamic Motion Control (DMC) Playback

The DVW-510 also provides a DMC playback capability, memorizing the tape speed trajectory over the DT speed range (-1 to +3 times normal speed).

Program Play

The DVW-510 has a Program Play mode which allows video recordings to be reproduced over a range of $\pm 15\%$ normal speed, in increments of 0.1%. With the BKDW-507 optional Audio Program Play board installed, the four digital audio signals can also be compressed or extended (with correct pitch) along with the video signal. This useful feature allows the duration of a program to be extended or shortened so that it will fit into an allocated time period.



DVW-510

Adjustment Free Operation

Automatic Alignment Systems

The DVW-510 is fitted with Automatic Alignment Systems to ensure the accurate reproduction of digital data. This includes an Automatic Equalizer which optimizes the gain and phase of the off-tape RF signal. With a powerful error correction and concealment capability, this automatic equalizer provides accurate reproduction of video and audio data ensuring stable picture and sound quality. In addition to this auto RF equalizer, the alignment system also adjusts the servo systems to optimize tape tension, capstan frequency and drum phase, and DT performance after parts in the tape transport have been replaced.

These automatic systems eliminate the need for time consuming manual equalizer and servo system adjustments, ensuring stable and consistently high playback performance.

Sophisticated Mechanical Design

Reliable Tape Transport

The tape transport mechanisms of the DVW-510 is designed for precision and robustness. It uses a mid rotary type scanner which is positioned between the upper and lower drums to obtain fine head-to-tape contact. Additionally, several dust-protection systems maintain the proper reproduction of digital data. This includes head cleaners for both rotary and time code/cue audio heads, a tape cleaner and an



enclosure to prevent air flow into the tape transport housing. With the use of powerful error correction and concealment systems, these dust-protection features maintain accurate data playback.

Easy Maintenance

A sophisticated diagnostic system advises of malfunctions within the VTR. When a fault occurs, an error message is provided on both the tape timer display and those video outputs which have a character superimposition facility. The precise location and nature of a fault can then be quickly determined before it becomes a major problem.

In the DVW-510, most of the circuits are arranged on plug-in boards to allow quick and easy maintenance. Additionally, the drum assembly has been primarily designed to achieve easy, low cost maintenance and simplify both mechanical and electric alignment after scanner replacement. This helps to drastically reduce the time taken for periodic scanner replacement and minimizes manual adjustments.



Easy Operation

Channel Condition Monitoring

The DVW-510 has a three-color channel condition indicator, each color representing a particular error rate threshold level. Green indicates a good condition, yellow advises caution but operation can continue and red warns of a problem with either the tape or VTR. Details of the error rate of each channel can be observed through an RS-232C communication port, allowing the monitoring of multiple VTRs.

Built-in Signal Generator

A built-in signal generator is included to help system set-up and maintenance. This internal generator provides 16 test signals, including color bars, ramp, multiburst, black burst, etc. Tone is also provided for audio line-up.

Audio Monitoring

A matrix of push buttons is provided for audio monitoring switching. Each of the four playback channels (and the cue channel) can be switched to either the left or right monitor outputs. The audio level meters and the playback level controls for the four digital audio channels and the cue channel are located on the upper control panel.

Ease of Initial Set-up

Set-up parameters of the DVW-510 can be set in its menu-style operation using the search dial. While a simple, single line, menu is provided on the tape timer display, a descriptive, multi-line menu is also superimposed on one of the analog composite and one of the serial digital outputs. In order to be able to set up VTRs quickly, the DVW-510 is equipped with three user memories of set-up parameters. These memories are simply recalled with the set-up select switch and set-up parameters are instantly changed to the stored values. With the use of these set-up memories, a VTR can be immediately set up for a specific application.

Versatile System Interface

Digital Output

Serial digital video and audio

The DVW-510 is equipped with SDI (Serial Digital Interface) which conforms to the SMPTE259M. SDI carries one digital video signal, four digital audio channels and time code through a single coaxial cable.

Serial digital audio

Digital audio output ports conform to AES/EBU format synchronized to video. The four channels of digital audio are coupled into pairs, CH1/CH2 and CH3/CH4.

Analog Output

Output ports for analog component video, four channels of analog audio and cue audio, together with analog composite video output ports are built into the DVW-510. They allow direct installation of these VTRs into analog systems without extra D/A converters.

Front control panel buttons select any combination of the four audio channels or cue audio to the monitoring outputs.

Remote

RS-422A

The DVW-510 is equipped with RS-422A serial communication ports to interface with Sony VTRs and edit controllers.

RS-232C

For communication with various equipment such as personal computers, an RS-232C serial communication port is incorporated. Various parameters can be set up and monitored through this port allowing comprehensive monitoring of the entire system.

Parallel I/F


For customized applications, an optional BKDW-509 Parallel (50P) Interface Kit is available, which allows remote control of basic VTR functions through the 50-pin parallel communication port.

Video control

The DVW-510 also has a 15-pin video control port through which the video processor can be adjusted from an optional BVR-50 Video Processor Controller.

Control panel

The control panel can be completely detached from the DVW-510 and remote operation can be extended up to 10m with an optional BKDW-510 Control Panel Extension Kit and BKDW-511 Control Panel Case.

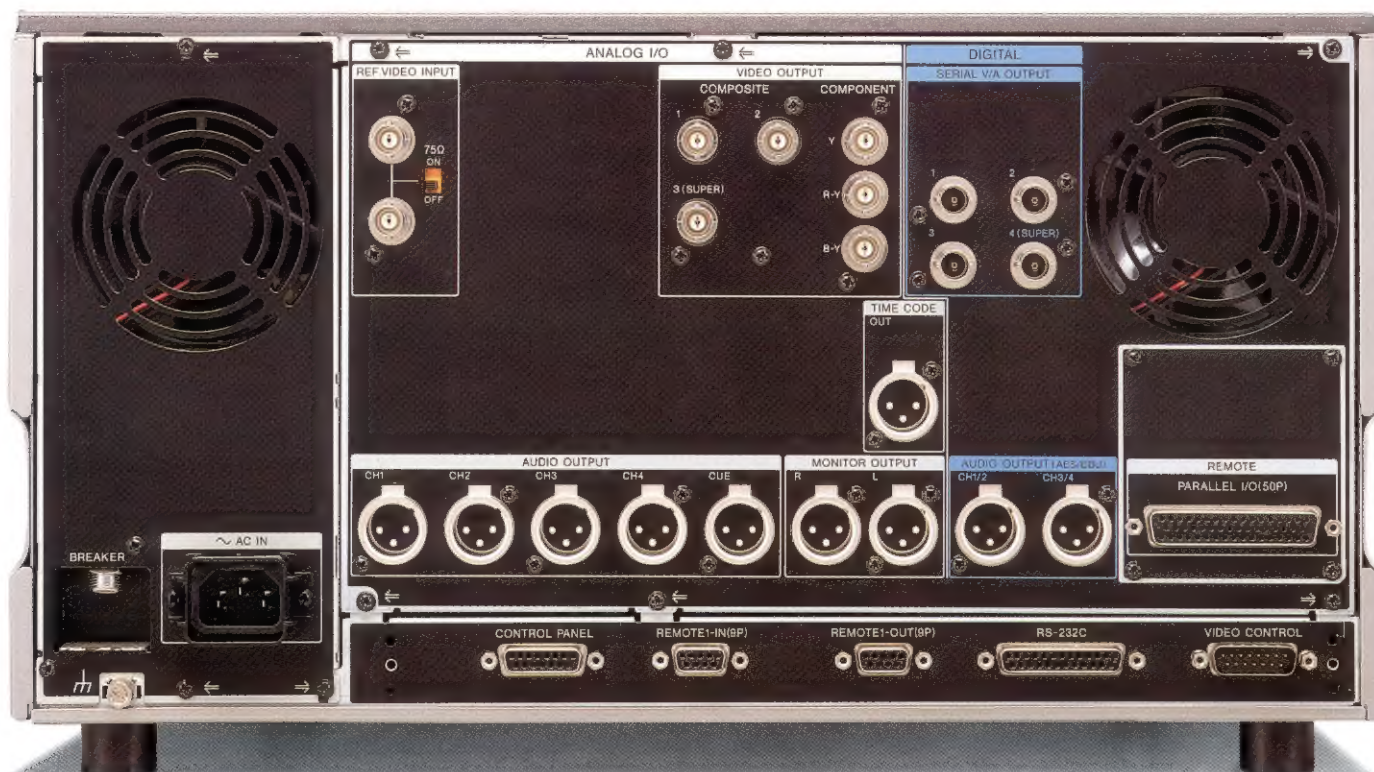


DVW-510


*Parallel I/F is optional

System Configuration


High Performance Post Production System

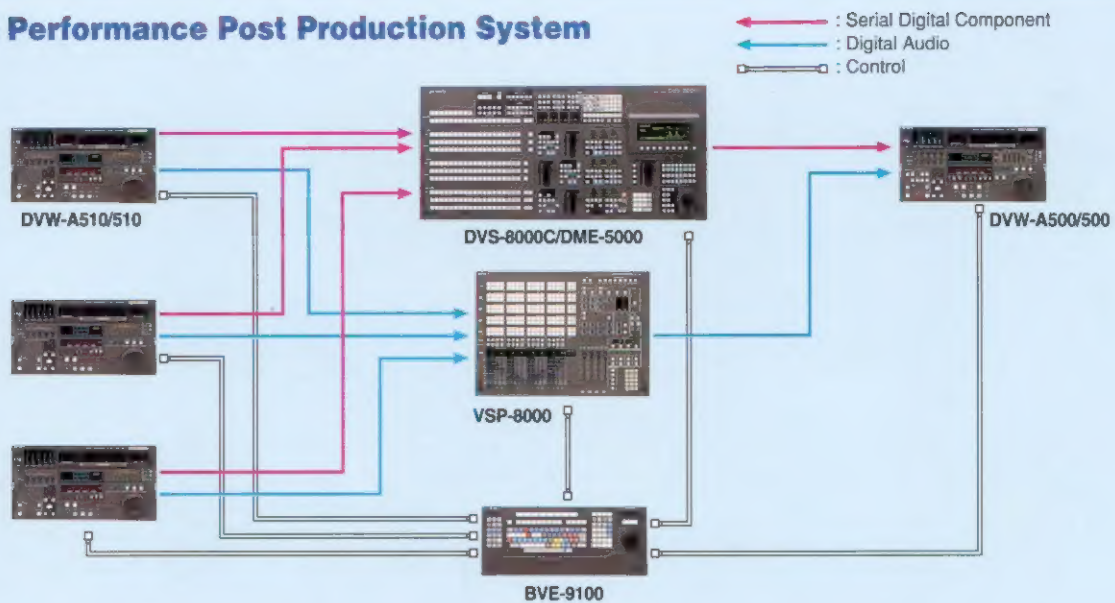

Mid-Range Post Production System

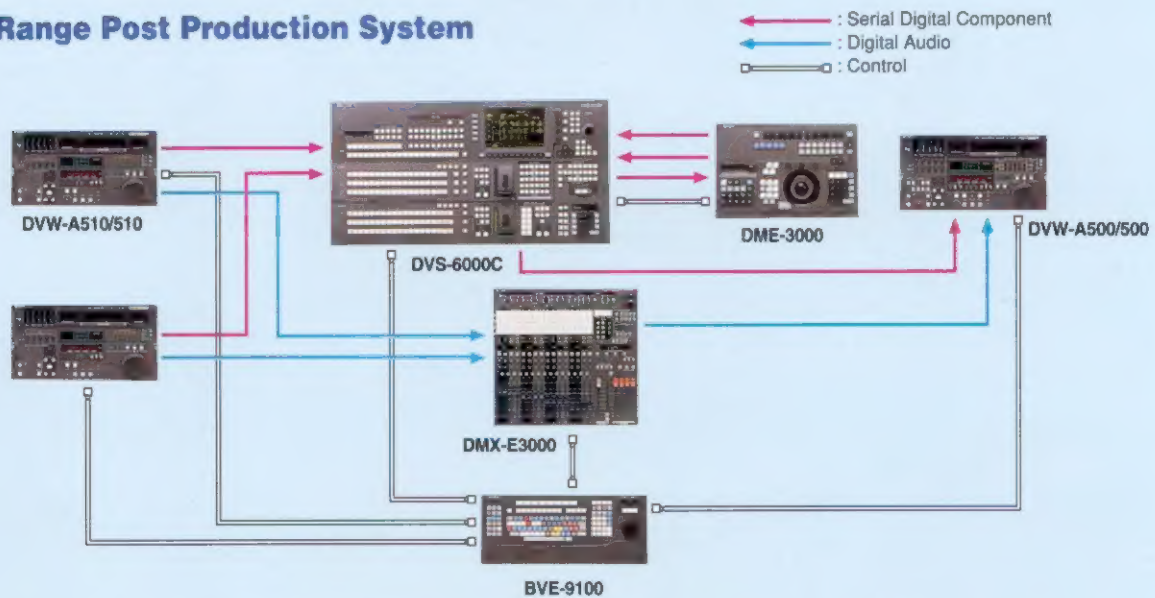

Standard Post Production System

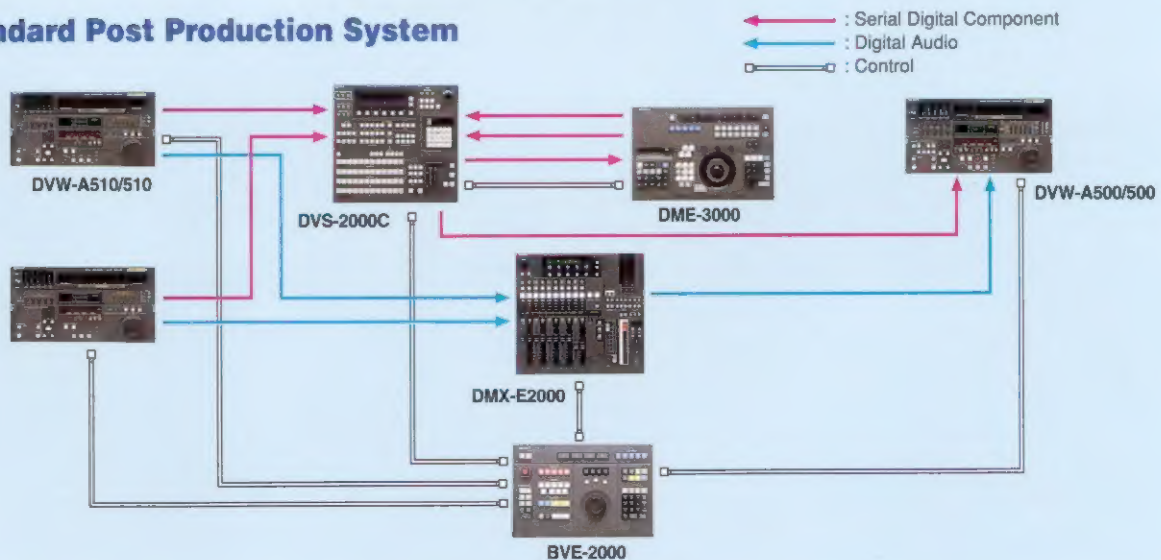


Optional Accessories



Parallel (50P) Interface Kit
BKDW-509



Control Panel Extension Kit
BKDW-510



Control Panel Case
BKDW-511



Video Processor Controller
BVR-50



Digital Rate Converter
DFX-1201



Digital Audio Delay Unit
DDU-2100



Digital Color Corrector
BVX-D10



Digital Video Interface Unit
PFV-D50/D100/D200

PFV-D50



Audio Converter Unit
DAF-2000A



Digital Audio Sampling Rate Converter
DFX-2400



Dynamic Motion Controller
DTR-3000



Digital 4:2:2 Input Kit
BKM-2085
(for BVM-1911/1912/1916/1311/1316 Series)




Digital Monitor Interface
DMIF-1000
(for PVM-1344Q/1944Q)



Digital Audio Cable
ECD-3C/10C/30C
(3m, 10m, 30m)



Remote Control Cable D-sub 9-pin
RCC-5G/10G/30G
(5m, 10m, 30m)



Rack Mount Kit
RMM-110



Digital Video Cassette
BCT-D6/D12/D22/D32/D40
(Small Cassette)
BCT-D34L/D64L/D94L/D124L
(Large Cassette)



Cleaning Cassette
BCT-5CLN

Audio Program Play Board
BKDW-507

Extension Board

Maintenance Manual (Part II)

Specifications

General

Power requirements	AC 90V to 265V, 48Hz to 64Hz
Power consumption	285VA (140W)
Operating temperature	+5°C to +40°C (41°F to +104°F)
Storage temperature	-20°C to +60°C (-4°F to +140°F)
Humidity	25 to 80% (relative humidity)
Weight	32kg (71 lb)
Dimensions (WxHxD) (including feet)	427 x 237 x 520 mm (16 7/8 x 9 3/8 x 20 1/2 inches)
Recording format	Digital BETACAM
Tape speed	96.7mm/s
Playback time	Max. 124 min with BCT-D124L cassette
Recommended tape	Sony BCT-D6/D12/D22/D32/D40 (small cassette) BCT-D34L/D64L/D94L/D124L (large cassette) or equivalent
Fast forward/rewind time	Approx. 3 min with BCT-D124L cassette
Search speed (Shuttle mode)	Still to approx. ± 50 times normal playback speed
Dynamic tracking range (Variable mode)	-1 to +3 times normal playback speed
Servo lock time	0.5s or less (from standby on)
Load/unload time	6s or less

Input/output signals

Video	
Input	
Reference	BNC (x1) with loop through 0.3Vp-p, 75 Ω
Output	
Serial digital interface	BNC (x4), SMPTE259M, 270Mbits/s (including 1 character out)
Analog component	BNC (x1, Y/R-Y/B-Y) Y: 1.0Vp-p, 75 Ω R-Y/B-Y: 0.7Vp-p, 75 Ω
Analog composite	BNC (x3) 1.0Vp-p, 75 Ω (including 1 character out)
Audio	
Output	
Digital	XLR 3-pin (CH 1/2, 3/4), AES/EBU format, stereo mode, balanced BNC (SDI, video & audio), SMPTE259M, 270Mbits/s
Analog	XLR 3-pin (CH 1,2,3,4, Cue) +4dBm at 600 Ω load, low impedance, balanced
Monitor L/R	XLR 3-pin, +4dBm at 600 Ω load, low impedance, balanced
Headphones	JM-60 stereo phone jack, - ∞ to -12dBu at 8 Ω load, unbalanced
Time code	
Output	XLR 3-pin, 2.2Vp-p, low impedance, balanced
Remote	
Remote 1 in	D-sub 9-pin, RS-422A interface
Remote 1 out	D-sub 9-pin, RS-422A interface
RS-232C	D-sub 25-pin, RS-232C Interface
Parallel I/O (Remote 2)	D-sub 50-pin, (with optional BKDW-509 Parallel (50P) Interface Kit)
Video control	D-sub 15pin, (for optional BVR-50 Remote Controller)
Control panel	15-pin, (for optional BKDW-510 Control Panel Extension Kit)

Processor adjustment range

Video level	± 3 dB/- ∞ to +3dB selectable
Chroma level	± 3 dB/- ∞ to +3dB selectable
Setup/Black level	± 210 mV
Chroma phase/Hue	$\pm 30^\circ$
System Sync phase	$\pm 15\mu$ s
System SC phase	± 200 ns

Video/Audio performance

● Digital Video	
Sampling frequency	Y: 13.5MHz R-Y/B-Y: 6.75MHz
Quantization	10 bits/sample
Error correction	Reed-Solomon code
Error concealment	Adaptive three dimensional
Analog component output	
Bandwidth	Y: 0 to 5.75MHz ± 0.5 dB R-Y/B-Y: 0 to 2.75MHz ± 0.5 dB
S/N ratio	62dB or more
K-factor (2T pulse)	1% or less
Analog composite output	
Bandwidth	Y: 0 to 5.75MHz +0.5/-0.7dB
S/N ratio	58 dB or more
Differential gain	2% or less
Differential phase	2° or less
Y/C delay	15ns or less
K-factor (2T pulse)	1% or less
● Digital Audio (DA 1 to DA 4 channels)	
Sampling frequency	48kHz (synchronized with video)
Quantization	20 bits/sample
Analog output D/A quantization	18 bits/sample
Frequency response (0dB at 1kHz)	20Hz to 20kHz, +0.5dB/-1.0dB
Dynamic range (at 1kHz, emphasis ON)	More than 95dB
Distortion (at 1kHz, emphasis ON, reference level)	Less than 0.05%
Cross talk (at 1kHz, between any two channels)	Less than -80dB
Wow & flutter	Below measurable level
Head room	20dB (18dB selectable)
Deemphasis (ON/OFF auto)	T1 = 50 μ s, T2 = 15 μ s
● Analog Audio (Cue track)	
Frequency response	100Hz to 12kHz ± 3 dB
S/N ratio (at 3% distortion level)	More than 45dB
Distortion (T.H.D at 1kHz reference level)	Less than 2%
Wow & flutter	Less than 0.2% rms

* Reference level: +4dBm

Supplied accessories

AC power cde	(1)
RCC-5G 9-pin remote control cable	(1)
PSW 4 x 16 screws for rack mounting	(4)
Operation manual	(1)
Installation manual	(1)
Maintenance manual (Part I)	(1)

ISR (Interactive Status Reporting) is an equipment management system developed by Sony Corporation.

"Betacam", "Betacam SP" and "Digital BETACAM" are trademarks of Sony Corporation.

"Library Management System", "Betacart" and "Flexicart" are trademarks of Sony Corporation.

"Dynamic Tracking (DT)" is a trademark of Sony Corporation.

Design and specifications subject to change without notice.